



19" Panel PC - Intel Core i7

Art-Nr. R0919OF0004i78SD / H32116 (24V Version)

Art-Nr. R0919OF0000i78SD / H32116 (230V Version)



Technische Beschreibung:

Industrie TFT

19", SXGA 1280*1024, 350 cd/m², LED Backlight

MB-MITX-989G3-QM77:

Board Mini-ITX, für Intel 3rd gen- Core

CPU Intel Core i7-3610QE Mobile, 4x 2.3GHz, 5GT/s, Socket G3 988/989, rPGA,
4x 256KB L2 Cache, 6x GB L3 Cache, Ivy Bridge

CPU, Chipset Intel QM77 PCH, 2x DDR3 SO-DIMM max. 16GB, VGA shared,
Dual Gigabit LAN Intel, Audio, Watchdog, timer, H/W Monitor

I/O intern: 1x PCIe16, 2x Mini-PCIe1, 4x SATA/300, 2x SATA/600, 4x USB2.0,
2x USB3.0, 2x RS-232

I/O extern: 1x RS-232/422/485, 1x RS-232, DVI-D, DVI-I,
Display-Port, 2x RJ45 LAN, 4x USB2.0, 2x USB3.0, 3x Audio
Klinke

Arbeitsspeicher: 2x 4GB RAM DDR-3 SO-DIMM, 1333MHz

Solid State Disk (SSD), 2.5" SATA, 64GB

Gehäuse für 19" TFT

- Frontplatte mit Kundenspezifischer Tastatur und Lexan Schutzscheibe
- 2x COM zusätzlich (insgesamt 4x COM)
- Tastaturcontroller integriert


Stromversorgung

DC24V: DC In 6~32V DC oder wahlweise 230V
Schraubklemmenanschluss

Betriebssystem

WIN 7 / WIN 8 / WIN 10

Maßzeichnung Frontplatte:

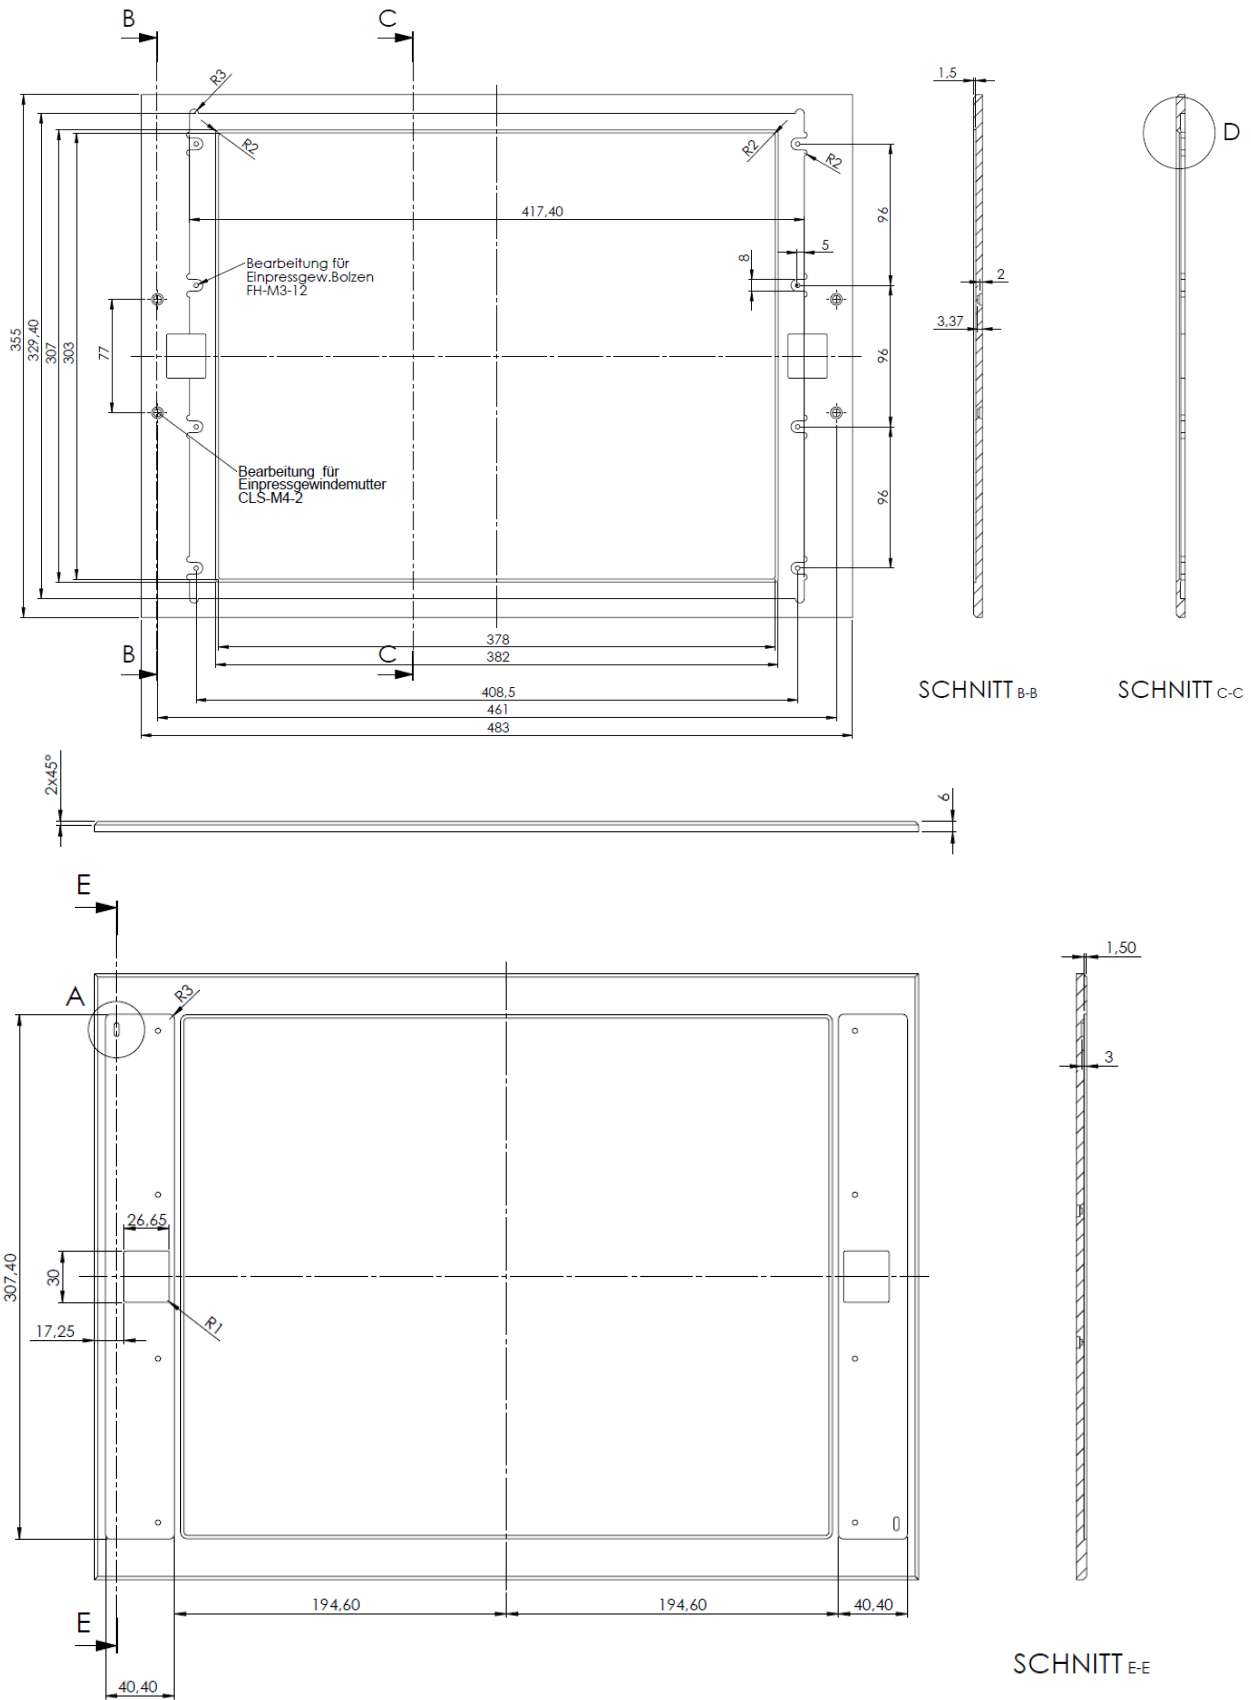



Maßzeichnung Gehäuse:

